



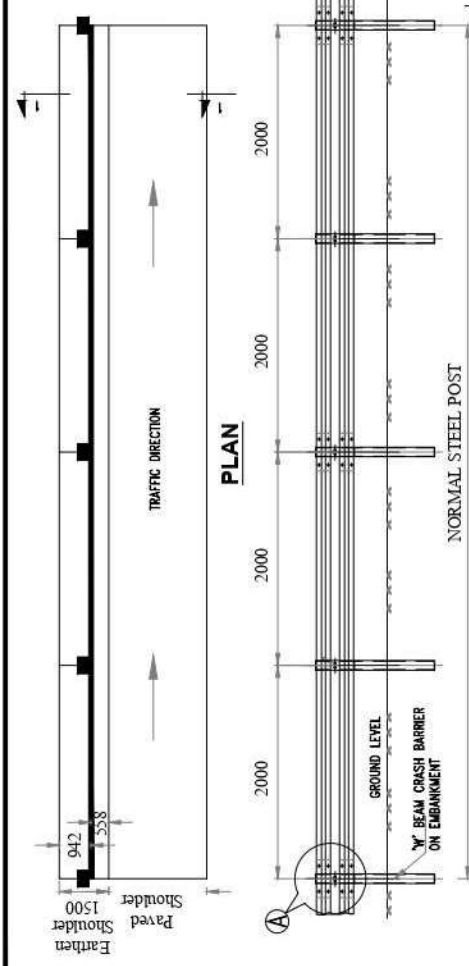


ELEVATION OF SINGLE SIDED GUARD RAIL

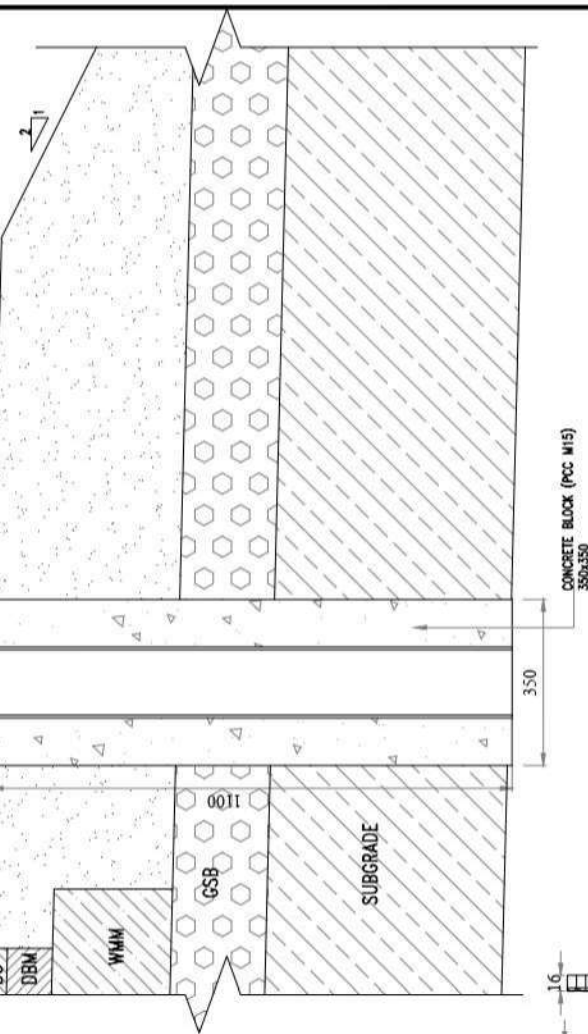

DETAIL - A & SECTION 1-1

- NOTES**
1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE MENTIONED
 2. SUITABLE REFLECTORS ARE TO BE PROVIDED ON W-BEAM AT A SPACING OF 2 M C C
 3. ANCHOR CABLE HOOKS TO BE IN CONTACT WITH ANCHOR REINFORCEMENT WHEN CONCRETE IS PLACED
 4. ALL HOLES IN POSTS AND BLOCKS SHALL BE 11.50MM MAX
 5. W-BEAM SHALL BE AS PER IS : 5986 - 1992 AND POST SPACERS ETC SHALL BE PER IS : 2062 - 1992
 6. W-BEAM, POSTS & SPACERS SHALL BE HOT DIP GALVANISED AS PER SPECIFICATIONS

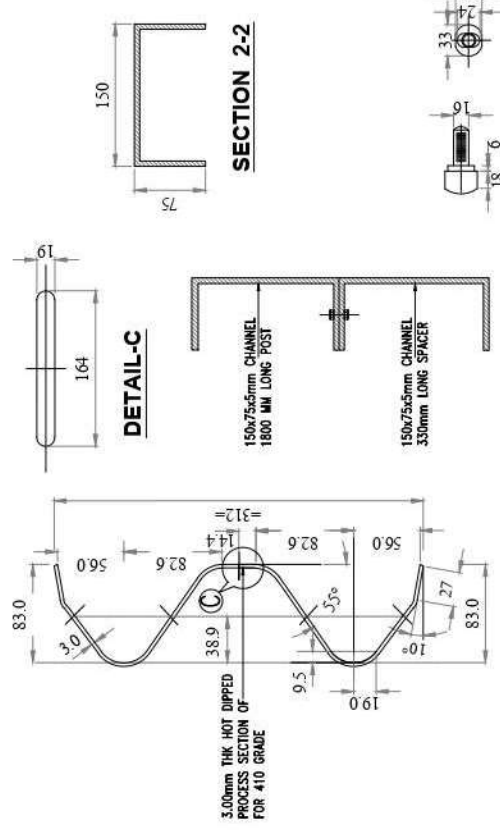

TYPICAL CROSS SECTION OF W-BEAM